


## General Gas Safety Information

Always read and observe appliance manufacturer and our instructions

### If you smell gas or suspect a leak:

- Do not switch on or off any lights or electrical equipment, smoke or use naked flames
- No matter where you smell gas:  
Close the gas emergency control (shut-off) valve (a) outside your property; and  
Close the isolation valve on top of the above - ground tank (b) or beneath the cover of the underground tank (c)

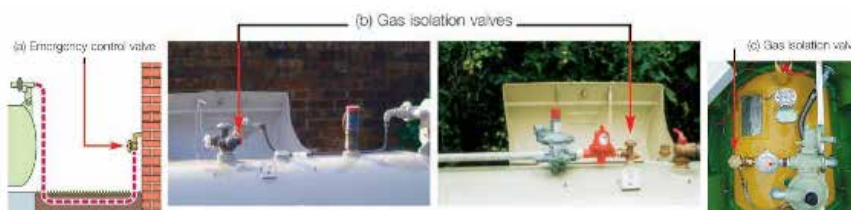

- If the smell of gas is indoors, open all doors and windows and ventilate at floor level and all low level areas
- Ring the Premier LPG emergency service number 01253 406666

### If a fire occurs:

- Dial 999 immediately to call the Fire Brigade. Ensure you tell them an LPG tank is on the premises
- Leave the premises and go to a safe place
- If safe to do so, shut all valves on the tank, and the emergency control valve, outside your property

### Installation and servicing:

- By law, gas - fixed indoor appliances must be installed and maintained by a Gas Safe registered installer
- All gas appliances need regular servicing. Indoor appliances should be serviced annually. Read the appliance instructions for guidance. Never tamper with the equipment
- Always provide adequate ventilation for appliances
- Never use an appliance or equipment which is damaged in any way

## Carbon monoxide:

- Carbon Monoxide is a poisonous gas which can be formed by burning any fuel if the appliance is not properly installed or maintained
- Carbon Monoxide detectors are widely available and it is **strongly** recommended that every household has one
- If you suffer symptoms of headaches, nausea or dizziness when an appliance is in use then turn it **off immediately**. Open windows and doors and have the appliance checked by a Gas Safe registered installer
- Seek medical attention, if required

## Regulator reset procedure:

- The tank was allowed to become empty and has now been filled
- The gas isolation valve (under the tank hood) has been turned off
- The supply to the house has been disconnected and re - connected. Resetting the regulator is done by operating the Under Pressure Shut Off (UPSO) as shown:



- Before resetting the UPSO you must perform the following checks:

Turn off all gas appliances and the emergency control valve on the exterior of the building

Check that the gas isolation valve, under the tank hood, is open. Turn it anti - clockwise if it is fully or partly closed

- Once completed, take the following 5 steps to reset the regulator:

Remove the cover cap marked "UPSO reset" on the regulator

Grip the spindle firmly and pull—**DO NOT PUSH**. You should be able to both hear and feel if the regulator has reset

Release the spindle gently and replace the cover cap

Slowly open the emergency control valve on the exterior of the building. Re - light any permanent pilots and check that all appliances will light to ensure that the gas supply has been re-established

If the gas supply does not re-establish itself, then check that all appliances are turned off and then repeat the reset procedures as detailed above

## Important:

If, after two attempts, the gas supply has not been re-established or you have any doubts or difficulty, contact the Premier LPG emergency service number 01253 406666

## Upso reset:

If you are unable to find the UPSO reset, please contact the Premier LPG emergency service number 01253 406666